

L.E.S. Series HW "Scotch Box" Boilers


3-Pass Firetube • 30, 40, or 80 psi Water • 83% Efficiency • 4 sq.ft. Waterside Heating Surface per BHP

Ratings/Data/Dimensions


Model: HW-	580	800	950	1150	1450	1800	2070	2200	2650	3000	3350	3680
Input												
Gas (MB/CF) CFH	695	960	1140	1385	1745	2165	2490	2650	3190	3610	4035	4430
Oil (140MB/Gal) GPH	5.0	6.9	8.1	9.9	12.5	15.5	17.8	18.9	22.8	25.8	28.8	31.6
Output												
MBH	580	800	950	1150	1450	1800	2070	2200	2650	3000	3350	3680
Boiler Horsepower	17	24	28	34	43	54	62	66	79	90	100	110
Gas Burner Motor HP	.25	.33	.33	.33	.5	.75	1.0	1.0	2.0	3.0	3.0	3.0
Oil Burner Motor HP	.33	.5	.5	.75	1.0	1.0	1.5	1.5	2.0	3.0	3.0	5.0
SQ.FT. Heating Surface												
Primary	16.7	20.8	20.6	24.7	28.7	35.6	40.4	40.4	46.6	46.5	51.9	57.3
Total Fireside	61	85	101	125	154	199	234	234	285	324	358	403
Total Waterside	66	93	111	138	170	220	258	258	315	359	397	447
Boiler Data												
Furnace Vol. (CU.FT.)	4.5	6.1	6.1	7.7	9.3	13.6	15.8	15.8	20.3	20.3	23.2	26.0
Water Cap. (Gal; Full)	80	104	99	123	145	197	229	229	272	260	300	337
Dry Weight (LBS)	1250	1525	1600	1875	2175	2775	3175	3175	3700	4150	4275	4675
Dimensions in Inches												
A Skid Length	29	39	39	49	59	59	68	68	68	68	78	88
AA Overall Length	64	76	76	91	110	112	121	121	128	128	138	154
B Width	28	28	28	28	28	34	34	34	34	34	34	34
BB Trimmed Width (Std)	30	30	30	30	30	36	36	36	36	36	36	36
C Height	58	58	58	58	58	64	64	64	72	72	72	72
CC Trimmed Height	64	64	64	64	64	71	71	71	80	80	80	80
D Rear Smokebox Depth	10	12	12	12	12	14	14	14	16	16	16	16
F Flue Connection Size	6	8	8	8	8	10	10	10	12	12	12	12
Flue Connection Height	48	48	48	48	48	56	56	56	62	62	62	62
P Burner Port Height	18	18	18	18	18	20	20	20	20	20	20	20
Burner Port ID	9¼	9¼	9¼	9¼	9¼	12¼	12¼	12¼	14½	14½	14½	14½
R Return Size (NPT)	2	2	3	3	3	4	4	4	4	4	4	4
Return Height	8½	8½	8½	8½	8½	10½	10½	10½	10½	10½	10½	10½
S Supply Size (*=Flange)	2	2	3	3	3	4*	4*	4*	4*	4*	4*	4*
Supply Height	58	58	58	58	58	64	64	64	72	72	72	72

30 psi design pressure standard. 40 or 80 psi design available. Consult L.E.S. for high pressure weights.


Side View

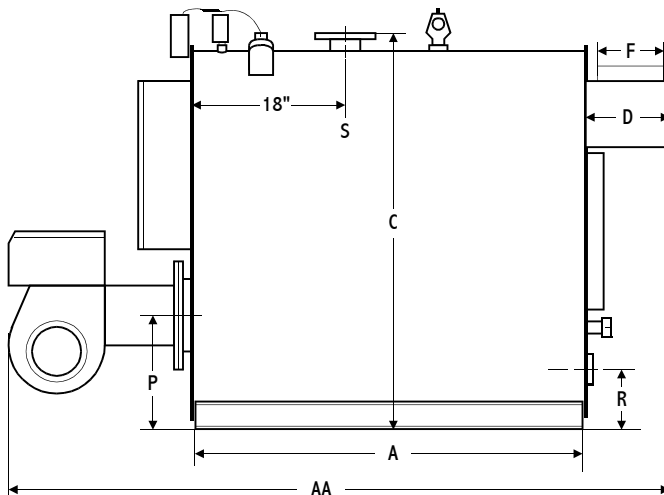

Front View

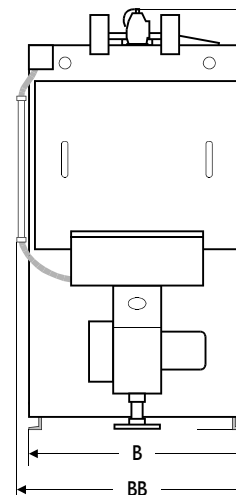

Rear View

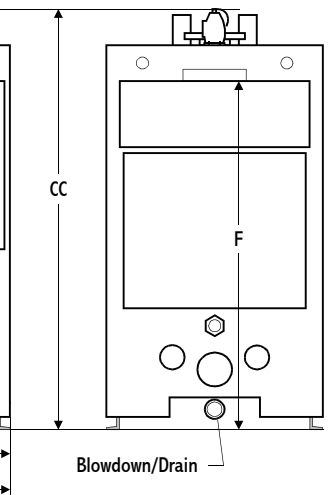

L.E.S. Series HW3 “Scotch Box” Boilers


3-Pass Firetube • 30, 40, or 80 psi Water • 83% Efficiency • 4 sq.ft. Fireside Heating Surface per BHP

Ratings/Data/Dimensions


Model: HW3-	15	20	25	30	40	50	60	70	80	90	100
Input											
Gas (MB/CF) CFH	600	800	1000	1200	1610	2010	2410	2820	3220	3620	4035
Oil (140MB/Gal) GPH	4.3	5.7	7.1	8.6	11.5	14.4	17.2	20.1	23.0	25.9	28.8
Output											
MBH	500	670	835	1000	1340	1675	2010	2345	2680	3015	3350
Boiler Horsepower	15	20	25	30	40	50	60	70	80	90	100
Gas Burner Motor HP	.25	.33	.33	.33	.5	.75	1.0	1.0	2.0	3.0	3.0
Oil Burner Motor HP	.33	.33	.5	.5	.75	1.0	1.5	1.5	2.0	3.0	3.0
SQ.FT. Heating Surface											
Primary	16.7	20.8	20.6	24.7	28.7	35.6	40.4	46.6	46.5	51.9	57.3
Total Fireside	61	85	101	125	154	199	234	285	324	358	403
Total Waterside	66	93	111	138	170	220	258	315	359	397	447
Boiler Data											
Furnace Vol. (CU.FT.)	4.5	6.1	6.1	7.7	9.3	13.6	15.8	20.3	20.3	23.2	26.0
Water Cap. (Gal; Full)	80	104	99	123	145	197	229	272	260	300	337
Dry Weight (LBS)	1250	1525	1600	1875	2175	2775	3175	3700	4150	4275	4675
Dimensions in Inches											
A Skid Length	29	39	39	49	59	59	68	68	68	78	88
AA Overall Length	64	76	76	86	101	112	121	123	128	138	148
B Width	28	28	28	28	28	34	34	34	34	34	34
BB Trimmed Width (Std)	30	30	30	30	30	36	36	36	36	36	36
C Height	58	58	58	58	58	64	64	72	72	72	72
CC Trimmed Height	64	64	64	64	64	71	71	80	80	80	80
D Rear Smokebox Depth	10	12	12	12	12	14	14	16	16	16	16
F Flue Connection Size	6	8	8	8	8	10	10	12	12	12	12
Flue Connection Height	48	48	48	48	48	56	56	62	62	62	62
P Burner Port Height	18	18	18	18	18	20	20	20	20	20	20
Burner Port ID	9¼	9¼	9¼	9¼	9¼	12¼	12¼	14½	14½	14½	14½
R Return Size (NPT)	2	2	3	3	3	4	4	4	4	4	4
Return Height	8½	8½	8½	8½	8½	10½	10½	10½	10½	10½	10½
S Supply Size (*=Flange)	2	2	3	3	3	4*	4*	4*	4*	4*	4*
Supply Height	58	58	58	58	58	64	64	72	72	72	72

30 psi design pressure standard. 40 or 80 psi design available. Consult L.E.S. for high pressure weights.


Side View

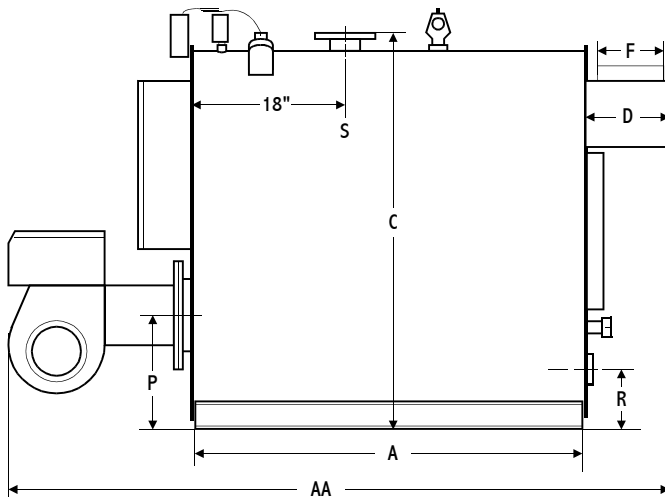

Front View

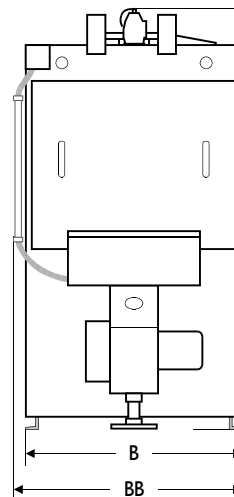

Rear View

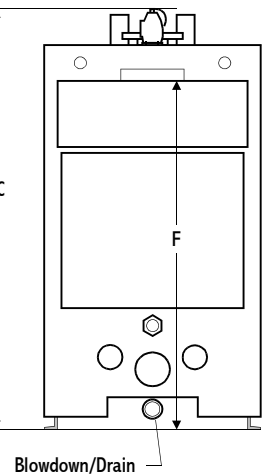

L.E.S. Series HW5 “Scotch Box” Boilers


3-Pass Firetube • 30, 40, or 80 psi Water • 83% Efficiency • 5 sq.ft. Fireside Heating Surface per BHP

Ratings/Data/Dimensions


Model: HW5-	12	16	20	25	31	40	47	57	65	71	80
Input											
Gas (MB/CF) CFH	480	645	800	1000	1245	1610	1890	2290	2610	2850	3220
Oil (140MB/Gal) GPH	3.4	4.6	5.7	7.1	8.9	11.5	13.5	16.4	18.6	20.4	23.0
Output											
MBH	400	535	670	835	1035	1340	1575	1905	2175	2375	2680
Boiler Horsepower	12	16	20	25	31	40	47	57	65	71	80
Gas Burner Motor HP	.25	.25	.33	.33	.33	.33	.5	1.0	1.0	1.0	2.0
Oil Burner Motor HP	.33	.33	.33	.5	.5	.75	1.0	1.5	1.5	1.5	2.0
SQ.FT. Heating Surface											
Primary	16.7	20.8	20.6	24.7	28.7	35.6	40.4	46.6	46.5	51.9	57.3
Total Fireside	61	85	101	125	154	199	234	285	324	358	403
Total Waterside	66	93	111	138	170	220	258	315	359	397	447
Boiler Data											
Furnace Vol. (CU.FT.)	4.5	6.1	6.1	7.7	9.3	13.6	15.8	20.3	20.3	23.2	26.0
Water Cap. (Gal; Full)	80	104	99	123	145	197	229	272	260	300	337
Dry Weight (LBS)	1250	1525	1600	1875	2175	2775	3175	3750	4150	4275	4675
Dimensions in Inches											
A Skid Length	29	39	39	49	59	59	68	68	68	78	88
AA Overall Length	64	76	76	86	101	103	121	123	123	133	148
B Width	28	28	28	28	28	34	34	34	34	34	34
BB Trimmed Width (Std)	30	30	30	30	30	36	36	36	36	36	36
C Height	58	58	58	58	58	64	64	72	72	72	72
CC Trimmed Height	64	64	64	64	64	71	71	80	80	80	80
D Rear Smokebox Depth	10	12	12	12	12	14	14	16	16	16	16
F Flue Connection Size	6	8	8	8	8	10	10	12	12	12	12
Flue Connection Height	48	48	48	48	48	56	56	62	62	62	62
P Burner Port Height	18	18	18	18	18	20	20	20	20	20	20
Burner Port ID	9¼	9¼	9¼	9¼	9¼	12¼	12¼	14½	14½	14½	14½
R Return Size (NPT)	2	2	3	3	3	4	4	4	4	4	4
Return Height	8½	8½	8½	8½	8½	10½	10½	10½	10½	10½	10½
S Supply Size (*=Flange)	2	2	3	3	3	4*	4*	4*	4*	4*	4*
Supply Height	58	58	58	58	58	64	64	72	72	72	72

30 psi design pressure standard. 40 or 80 psi design available. Consult L.E.S. for high pressure weights.


Side View

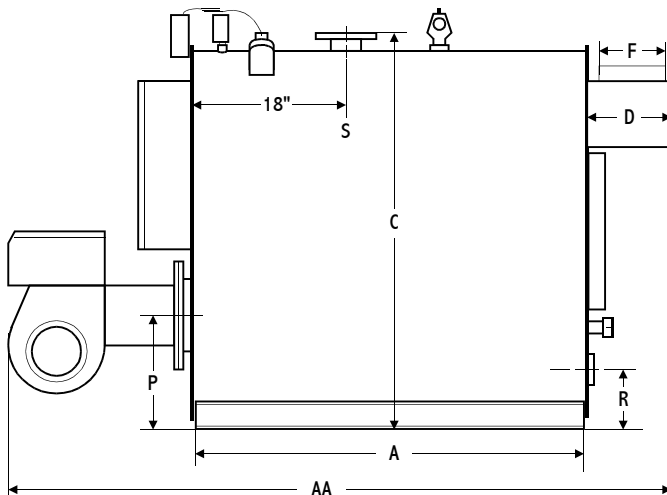

Front View

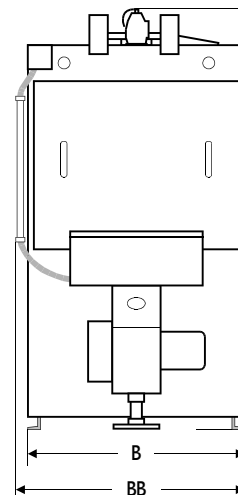

Rear View

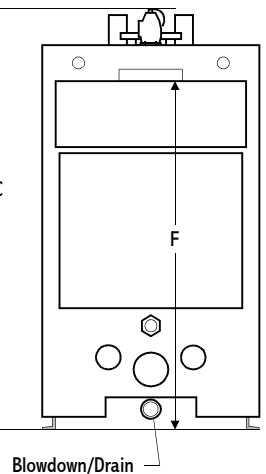

L.E.S. Series HCW High Capacity "Scotch Box" Boilers


3-Pass Firetube • Minimum Footprint Water • 83% Efficiency • 4 sq.ft. Waterside Heating Surface per BHP

Ratings/Data/Dimensions


Model: HCW-	3060	3350	3650	3680	4000	4140		3500H	3680H	4000H
Input										
Gas (MB/CF) CFH	3685	4035	4400	4430	4820	4990		4220	4430	4820
Oil (140MB/Gal) GPH	26.3	28.8	31.4	31.6	34.4	35.6		30.1	31.6	34.4
Output										
MBH	3060	3350	3650	3680	4000	4140		3500	3680	4000
Boiler Horsepower	91.4	100.1	109.0	109.9	119.5	123.7		104.6	109.9	119.5
Gas Burner Motor HP	3.0	3.0	3.0	3.0	5.0	5.0		3.0	3.0	5.0
Oil Burner Motor HP	3.0	3.0	5.0	5.0	5.0	5.0		5.0	5.0	5.0
SQ.FT. Heating Surface										
Primary	41.0	46.5	46.4	51.9	51.8	51.8		46.4	51.9	51.8
Total Fireside	335	360	392	396	427	448		373	396	427
Total Waterside	371	399	434	439	473	497		414	439	473
Boiler Data										
Furnace Vol. (CU.FT.)	17.4	20.3	20.3	23.2	23.2	23.2		20.3	23.2	23.2
Water Cap. (Gal; Full)	259	311	301	359	350	343		307	359	350
Dry Weight (LBS)	3375	3950	4000	4375	4450	4525		4275	4625	4750
Dimensions in Inches										
A Skid Length	59	68	68	78	78	78		68	78	78
AA Overall Length	119	128	134	144	144	144		134	144	144
B Width	34	34	34	34	34	34		34	34	34
BB Trimmed Width (Std)	36	36	36	36	36	36		36	36	36
C Height	76	76	76	76	76	76		76	76	76
CC Trimmed Height	81	81	81	82	82	82		81	82	82
D Rear Smokebox Depth	16	16	16	16	16	16		16	16	16
F Flue Connection Size	12	12	12	12	12	12		12	12	12
Flue Connection Height	68	68	68	68	68	68		70	70	70
P Burner Port Height	20	20	20	20	20	20		20	20	20
Burner Port ID	14½	14½	14½	14½	14½	14½		14½	14½	14½
R Return Size (NPT)	4	4	4	4	4	4		4	4	4
Return Height	10½	10½	10½	10½	10½	10½		10½	10½	10½
S Supply Size (*=Flange)	4*	4*	4*	4*	4*	4*		4*	4*	4*
Supply Height	76	76	76	76	76	76		76	76	76

30 psi design pressure except HCW-3500H/3680H/4000H [40 psi standard; 80 psi available].

Side View

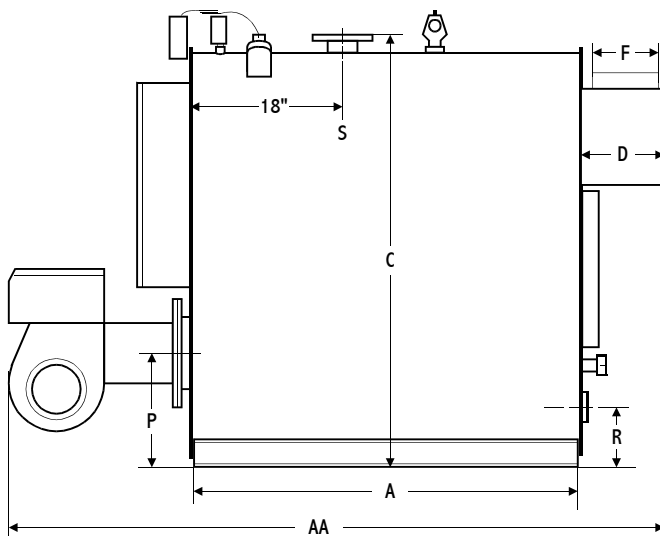

Front View

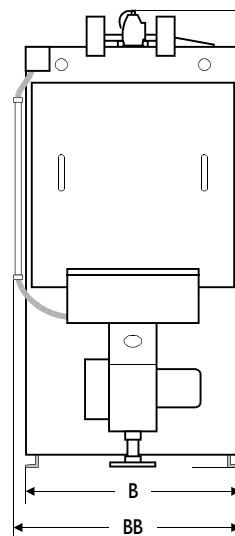

Rear View

